



1200 × 800 mm Plastic Pool Pallet Open or Closed deck

Made of impact-resistant PPC - no metal reinforcements - this pallet is ideal for semi-hygienic applications and for high-rotation usage such as open or closed pools.

The pallet deck is made using gas-assist technology, meaning that internal hollow channels make the pallet more rigid. This benefit is especially useful when the pallet is used in racks.



Rounded perimeter border reduces the risk of fork access damage to an absolute minimum.



The clearance (height and length) between the recessed blocks makes this a unique, easy-to-use-pallet.

Pallet available with or without lip by insert in the mould.



Solid skids, double-walled recessed blocks and superb design make this pallet extremely robust and ensure a long service life, even in high-rotation usage.

Technical data

Dimensions*

length	1.200 mm
width	800 mm
height	155 mm
window opening	91 mm
full ground clearance	116 mm

*dimensions in accordance with ISO, AFSOR, DIN, CEN

Load capacity*

static	4.000 kg
dynamic	2.000 kg
in rack**	virgin material 1.000 kg
	recycled material 850 kg

*loading capacities can vary according to the type of load

**homogenously distributed load

Weight 18 kg (+/-2%)

Temperature range

in use	-20°C up to +50°C
cleaning	up to +100°C

Characteristics


- heavy duty construction, well suited for intensive use in logistic companies
- easy and comfortable handling with all kind of lifting equipment.
- standard colour: virgin grey recycled anthracite
- high impact-resistant PPC
- pallet body & runners: structural foam/web technology.

- suited for use on automatic conveyor systems
- biologically stable
- adapted to use with wrap and shrink films
- perimetric impact zones
- UV and weather resistant

Options

- special colours available upon request (min. order 500 units)
- with or without retaining rim
- personalisation possible: silkscreen printing or insert
- anti-slip grommets on/under palletdeck – runners

Technical drawing

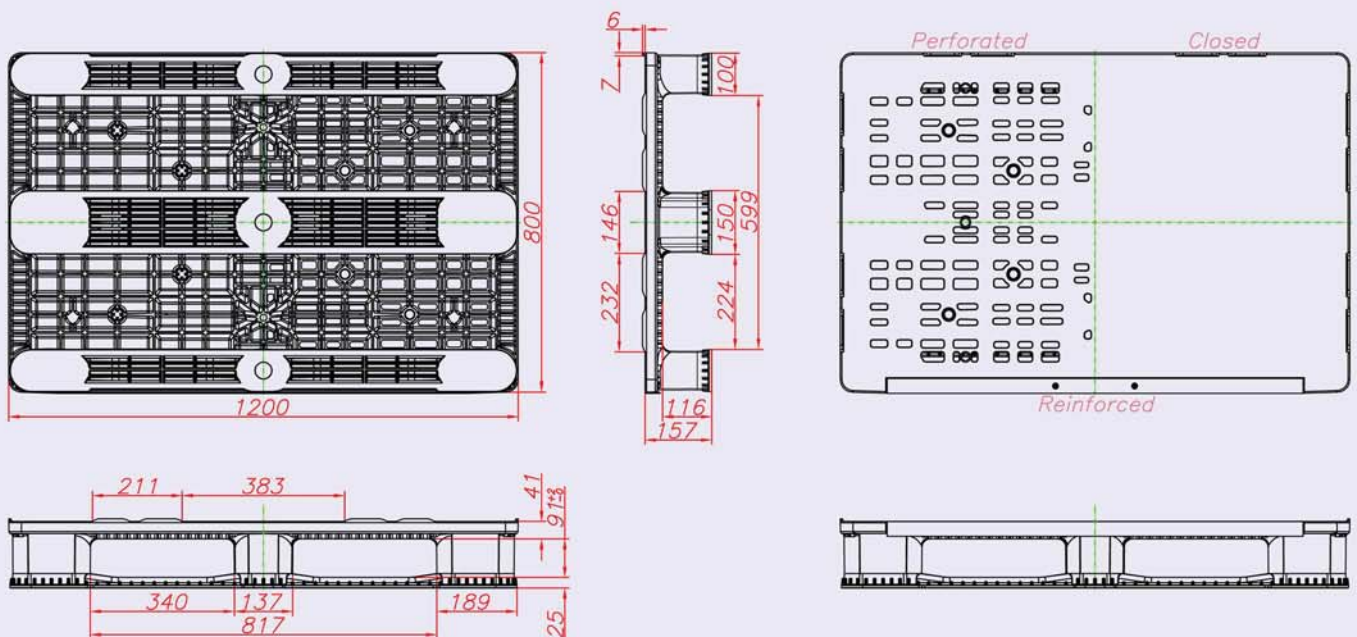

IPS – Rozendaalstraat 101 – B-8900 Ieper – Belgium
 tel: +32-57-22 91 10 – fax: +32-57-21 92 27 – e-mail: info@ips-belgium.com – www.ips-belgium.com

